

CE RoHS



SQ180L-S/SQ180L-M



PRODUCT PROFILE


Order Code	Lumen	Power	Voltage	Beam Angle	CCT	CRI
2575	2000lm	19W	220-240V	15°	3000K/4000K	Ra ≥ 80
2576	2000lm	19W	220-240V	24°	3000K/4000K	Ra ≥ 80
2577	2000lm	19W	220-240V	36°	3000K/4000K	Ra ≥ 80
2578	3000lm	28W	220-240V	15°	3000K/4000K	Ra ≥ 80
2579	3000lm	28W	220-240V	24°	3000K/4000K	Ra ≥ 80
2580	3000lm	28W	220-240V	36°	3000K/4000K	Ra ≥ 80

Optional Colors


- RAL9004 Black
- RAL9003 White
- RAL9006 Grey



Available Accessories



Cutting Angle: 30°
Lighting Efficiency: ≥80%
Net Weight: 0.7kg/0.9kg
Installation: Recessed Mounting
Material: Die-casting Aluminum
PCS Per CTN: 8PCS

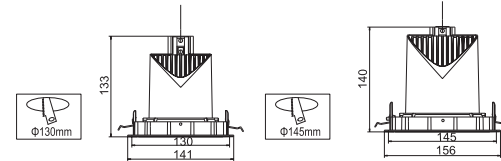

CE RoHS



SQ180L-L



PRODUCT PROFILE


Order Code	Lumen	Power	Voltage	Beam Angle	CCT	CRI
2085	3000lm	28W	220-240V	15°	3000K/4000K	Ra ≥ 80
2086	3000lm	28W	220-240V	24°	3000K/4000K	Ra ≥ 80
2087	3000lm	28W	220-240V	36°	3000K/4000K	Ra ≥ 80
2088	4500lm	45W	220-240V	15°	3000K/4000K	Ra ≥ 80
2089	4500lm	45W	220-240V	24°	3000K/4000K	Ra ≥ 80
2090	4500lm	45W	220-240V	36°	3000K/4000K	Ra ≥ 80

Optional Colors

- RAL9004 Black
- RAL9003 White
- RAL9006 Grey



Available Accessories



Cutting Angle: 30°
Lighting Efficiency: ≥80%
Net Weight: 1.5kg
Installation: Recessed Mounting
Material: Die-casting Aluminum
PCS Per CTN: 8PCS

